


经济型尼龙软管 Economical Conduit

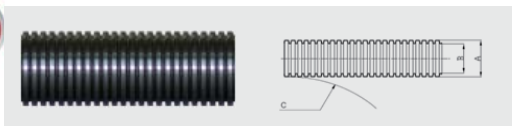

材质：尼龙 6

颜色：黑色

温度：-40°C~+120°C

防护等级：IP66, IP68(与接头及密封圈配合使用)

特性:柔软有韧性，壁厚较薄，表面有光泽，抗扭曲，中等机械强度，耐油、碱及弱酸等，耐摩擦，耐紫外线，不含卤素、磷、镉。

应用：机床，机械制造，电气控制系统等

Material: Polyamide 6

Colour: Black(BL)

Temperature range: -40°C ~ +120°C

Protection Degree: IP66, IP68(For use with RL fitting & seal)

Properties: Flexible and excellent tenacity, thin wall thickness, glossy surface, wind resistant, high mechanical strength, resistant to oil, acid and solvents. anti-friction, UV-resistant, free of halogen, phosphor and cadmium.

Applications: Machine tool, mechanical building, electric control system etc.

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
10	PA6- AD10.0	10.0	6.5	13	200
13	PA6- AD13.0	13.0	10.0	20	100
16	PA6- AD15.8	15.8	12.0	35	50
18	PA6- AD18.5	18.5	14.3	40	50
21	PA6- AD21.2	21.2	16.5	45	50
28	PA6- AD28.5	28.5	23.0	55	50
34	PA6- AD34.5	34.5	29.0	65	50
42	PA6- AD42.5	42.5	36.0	90	25
54	PA6- AD54.5	54.5	48.0	100	25



Realinkage 公司不断开发新产品，以满足客户的需求。

Realinkage never stop to research and development of new products to meet the requirements of customers.